
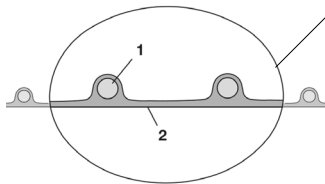


# T3300

Flexible Ducting

## Superflex || Polyurethane Ducting

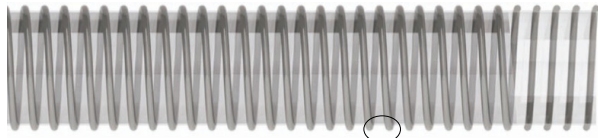

**Profile**  
1. Semi-rigid, crush resistant PVC spiral  
2. Layer of polyurethane

### Key Features

- Lightweight
- Resistant to abrasion and flexion
- Chemically resistant
- High flexibility and elasticity
- Phthalate free

### Standards & Specifications

FDA CFR 21.177.2600, EU Regulation 10/2011 (A, B, C, D2)

### Description

A flexible, lightweight, smoothbore, polyurethane ducting. Wall thickness ranges between 0.5mm-0.8mm. PU Superflex is hydrolysis and microbe resistant and made from FDA compounds.

### Applications

Superflex Polyurethane Ducting is up to 10 times more abrasive resistant than its PVC equivalent and offers resistance to premature ageing.

Ideally suited for applications requiring the conveying of abrasive materials such as sawdust, splinters, granules, salt, sugar and all kinds of powders and dusts.

### Construction

#### Liner

Single layer of polyurethane tape

#### Reinforcement

Semi-rigid, crush resistant PVC spiral

#### Cover

Single layer of polyurethane tape

### Temperature Range

-40°C to +80°C

Specification								
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	Vacuum (mth20)	Weight (kg/m)	Product Code
-	20		0.4	25		2.5	0.11	T3300-020
1"	25		0.4	30		2.5	0.15	T3300-025
1 ¼"	32		0.4	35		2.0	0.18	T3300-032
1 ½"	38		0.5	50		2.0	0.22	T3300-038
-	40		0.5	60		2.0	0.23	T3300-040
1 ¾"	45		0.5	65		2.0	0.27	T3300-045
2"	51		0.5	70		2.0	0.32	T3300-051
-	55		0.5	75		2.0	0.40	T3300-055
2 ⅜"	60		0.5	80		1.6	0.47	T3300-060
2 ½"	63		0.5	80		1.6	0.51	T3300-063
-	65		0.5	90		1.6	0.52	T3300-0665
3"	76		0.6	100		1.6	0.60	T3300-076
3 ⅝"	80		0.6	110		1.9	0.65	T3300-080
3 ½"	90		0.6	125		1.4	0.75	T3300-090
4"	102		0.6	140		1.3	0.83	T3300-102

Flextech Hose Solutions Ltd.

945-946 Yeovil Road  
Trading Estate, Slough  
Berkshire, SL1 4NH  
United Kingdom

Office: +44 (0) 1753 570 099

Accounts: +44 (0) 1753 378 984

Fax: +44 (0) 1753 550 011

Email: sales@flextechhose.co.uk

Website: flextechhose.co.uk

Company Registration Number: GB 7056556

VAT Number: GB 212764327

D-U-N-S: 216259232






# T3300

Flexible Ducting

Superflex || Polyurethane Ducting

0.4mm - 0.8mm Wall

Specification								
Size	ID (mm)	OD (mm)	Wall (mm)	Bend Radius (mm)	WP (bar)	Vacuum (mtH2O)	Weight (kg/m)	Product Code
5"	127		0.6	170		1.0	1.15	T3300-127
5 1/2"	140		0.7	180		0.9	1.43	T3300-140
6"	152		0.7	200		0.8	1.50	T3300-152
-	160		0.7	220		0.7	1.94	T3300-160
7"	180		0.7	250		0.4	2.14	T3300-180
8"	200		0.7	260		0.4	2.30	T3300-200
9"	250		0.8	300		0.4	3.40	T3300-250
10"	300		0.8	350		0.3	4.10	T3300-300

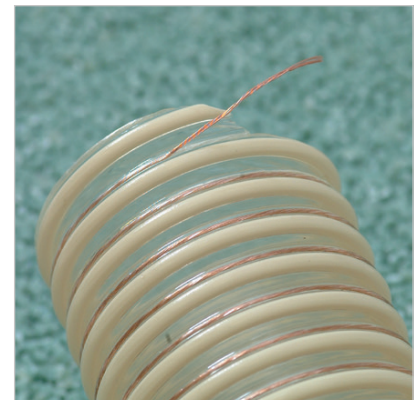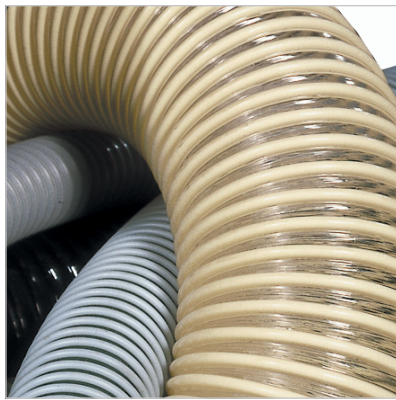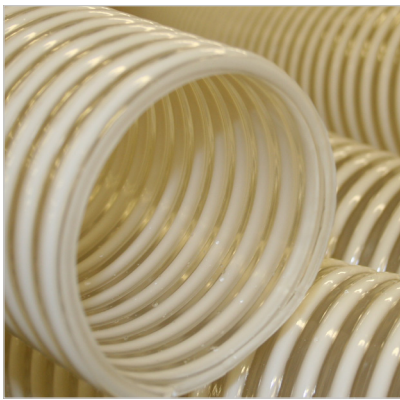

## Notes

Available in 30m, 20m & 10m lengths