


FlexFlon General Purpose Chemical Composite Hose

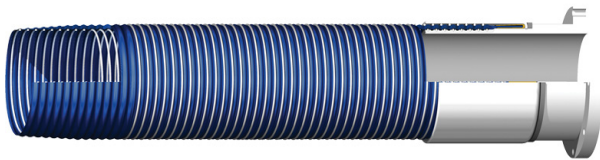

Description

A 14 bar suction and delivery hose for a wide range of chemical applications. The chosen materials of this hose, PTFE and ECTFE, are suitable for conveying the majority of media for chemical applications.

Construction

Liner

PTFE and ECTFE fabrics sealed with polypropylene films

Reinforcement/s

Options:

(SG) 316 stainless steel inner wire and high tensile strength galvanised outer wire with a heavy hot dipped zinc coating to reduce corrosion.

(SS) 316 stainless steel inner wire and 316 stainless steel outer wire.

Cover

A wear and weatherproof layer of polypropylene coat and polyester films.

Standards & Specifications


BS EN 13765: Type 3 and Type 4, BS 5842:1980

Temperature Range

-40°C to +121°C

Size	ID (mm)	Bend Radius (mm)	Specification				Product Code
			WP (bar)	BP (bar)	Weight (kg/m)		
1"	25	100	14	56	0.8	T7620-025	
1 ½"	38	125	14	56	1.2	T7620-038	
2"	50	160	14	56	1.9	T7620-050	
2 ½"	65	190	14	56	2.5	T7620-065	
3"	75	200	14	56	3.0	T7620-075	
4"	100	310	14	56	5.2	T7620-100	

Construction



Available End Connections

